



INSTALLATION INSTRUCTIONS

C-VS-1900-DUR-PM and C-VS-1900-DUR-PM-2 19" Vehicle specific printer mount console for 2021-2025 Durango Pursuit (without center console)

Notes: <u>Does not fit</u> Pursuit vehicle with interior upgrade console or Retail and SSV Durango with console "T" shifter.

For Brother Pocket Jet Printer (not included)


TOOLS REQUIRED:

Metric Socket set T20 Torx driver Trim panel removal tool

Standard Socket set

PARTS and MOUNTING HARDWARE:

QTY	DESCRIPTION	PART#
1	Front mounting bracket	25149
1	Rear mounting bracket	23700
8	1/4" x 3/4" Carriage bolt	16223
8	1/4" Serrated nut	16013
1	USB-A to 90° USB Mini-B extension cable	16934 for PocketJet 6 and 7 (C-VS-1900-DUR-PM)
OR		
1	USB-A to 90° USB-C extension cable (DS-DA-340)	37554 for Pocket let 8 (C-VS-1900-DUR-PM-2)

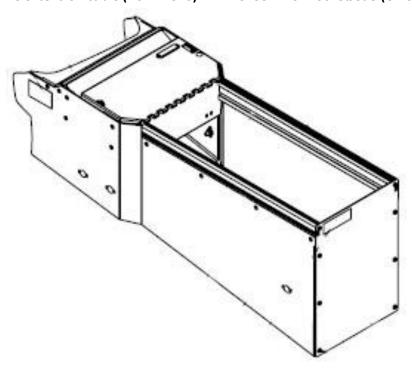

Always!

- > Read all instructions before installing any Havis, Inc. products.
 - Use hardware provided with install kit





Havis, Inc. 75 Jacksonville Road Warminster, PA 18974 T800-524-9900 F215-957-0729 www.havis.com



Remove the OEM tunnel plate from the center. Retain the (4) 10mm head bolts for later use.



Remove the nut for the factory ground wire and unclip harness.



Slide forward mounting bracket under OEM harness and ground stud.



Once the bracket has been slid under the harness, reinstall ground wire back onto stud using previously removed nut.



Line front of bracket up to center dash. Attach using previously removed 10mm head fasteners.



Place rear mounting bracket over rear mounting tabs.






Havis, Inc. 75 Jacksonville Road Warminster, PA 18974 T800-524-9900 F215-957-0729 www.havis.com



Attach rear mounting bracket using previously removed 10mm head fasteners.



Place console housing over front and rear mounting brackets and slide towards dash.



Attach rear of console to rear mounting bracket with 1/4" x 3/4" carriage bolts and serrated nuts.



Attach passenger side of console to front mounting bracket with 1/4" x 3/4" carriage bolts and nuts.



Attach driver side of console to front mounting bracket with 1/4" x 3/4" carriage bolts and nuts.



Run wiring for printer through left side of printer bracket opening.





Install Brother PocketJet printer and paper roll into printer holder.



Havis, Inc. 75 Jacksonville Road Warminster, PA 18974

Wire and install all equipment.



C-VS-1900-DUR-PM console shown with C-DMM-3024, TSD-201 and PKG-KB-208.



C-VS-1900-DUR-PM console shown with PKG-MD-ARM-0603 and PKG-KB-208.



C-VS-1900-DUR-PM console shown with C-MD-119 and C-HDM-204.



C-VS-1900-DUR-PM console shown with C-DMM-3024, PKG-MD-ARM-0603 and PKG-KB-208.