




INSTALLATION INSTRUCTIONS

TOOLS LIST:


1. #2 PHILLIPS SCREW OR DRILL DRIVER
2. 3/16" HEX WRENCH
3. 9/64" HEX WRENCH

ASSEMBLY STEPS:

1. SLIDE THE **INNER CLAMP** ONTO THE **POLE** AND HOLD AT THE DESIRED HEIGHT.
2. TIGHTEN **2X #8-32 X .750 LONG SOCKET SCREWS** AS SHOWN IN **DETAIL C**. ENSURE THE **INNER CLAMP** IS INSTALLED WITH THE **STOP TAB** FACING FRONT AS SHOWN IN **DETAIL A**.
3. SLIDE THE **ROTATING PAYMENT TERMINAL ASSEMBLY** ONTO THE **POLE** TO REST UPON THE **INNER CLAMP** AS SHOWN.
4. TIGHTEN THE **2X 1/4-20 SOCKET HEAD CAP SCREWS** TO SECURE THE **ROTATING PAYMENT TERMINAL ASSEMBLY** TO THE **POLE** AS SHOWN IN **DETAIL B**.
5. ASSEMBLE THE **ENS OPEN HOLE SWIVEL STAND** TO THE **ROTATING PAYMENT TERMINAL ASSEMBLY** USING THE **3X #6-32 X .31 LONG PHILLIPS SCREWS** AS SHOWN.
6. INSTALL THE **CREDIT CARD MACHINE** AND FOLLOW THE INSTRUCTIONS THAT COME WITH THE **ENS OPEN HOLE SWIVEL STAND** FOR FINAL INSTALLATION OF THE **ENS OPEN HOLE SWIVEL STAND**.
7. USE THE **CABLE CLIP** AND **#8-32 X .25 LONG PHILLIPS SCREW** TO SECURE **CABLES** TO THE **ROTATING PAYMENT TERMINAL ASSEMBLY**.

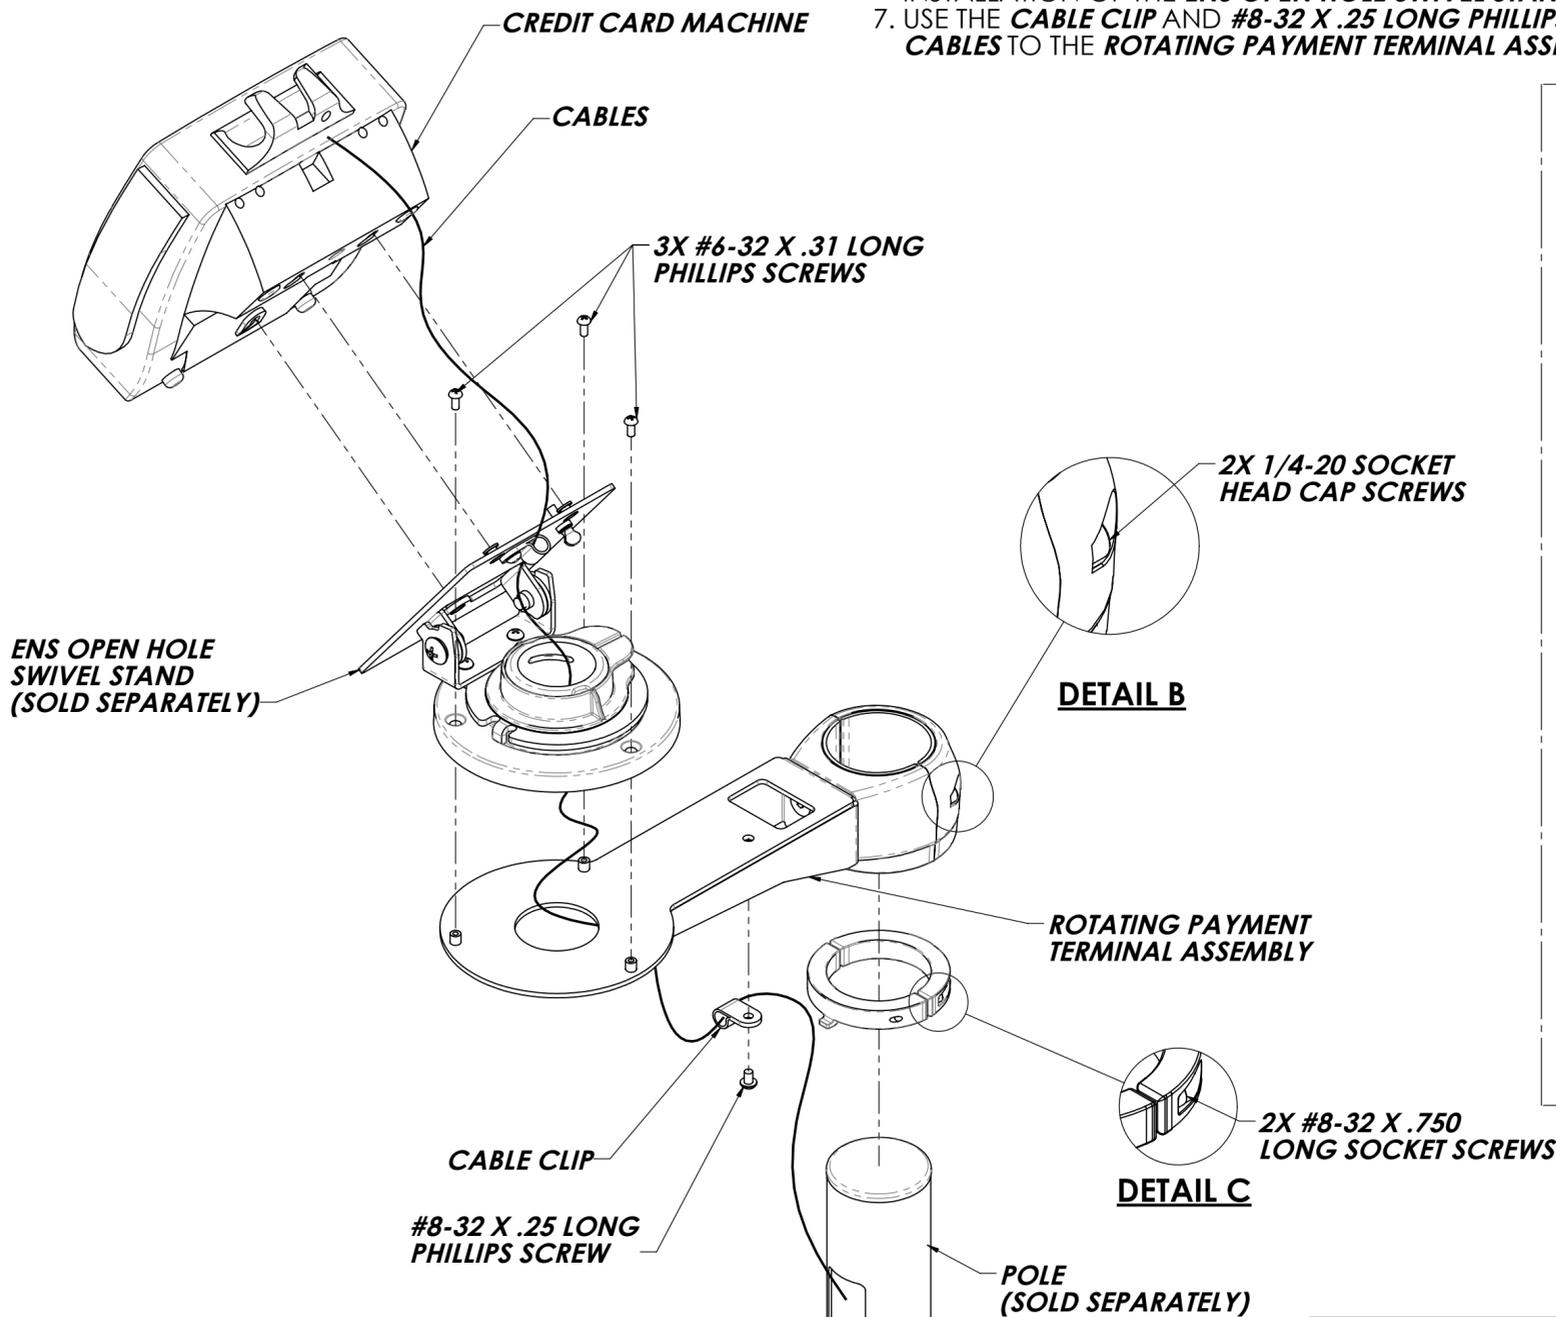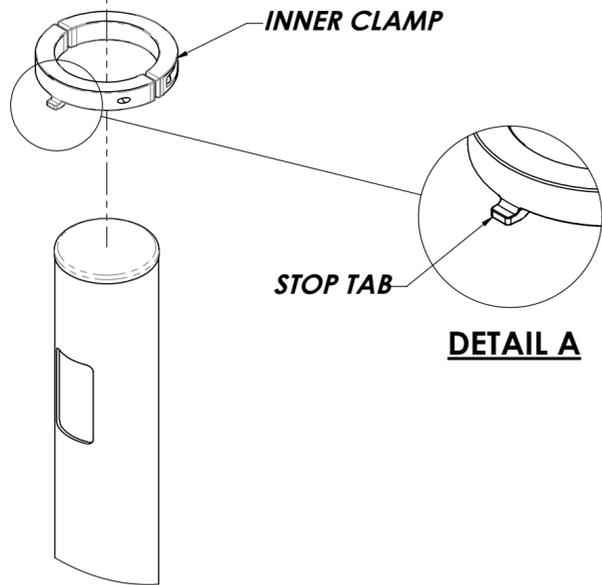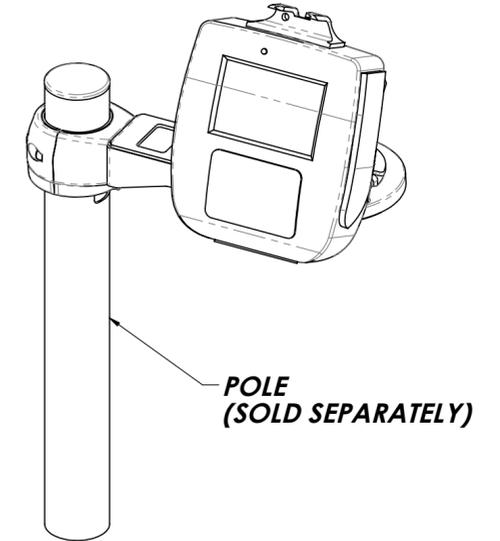

HEIGHT ADJUSTMENT INSTRUCTIONS

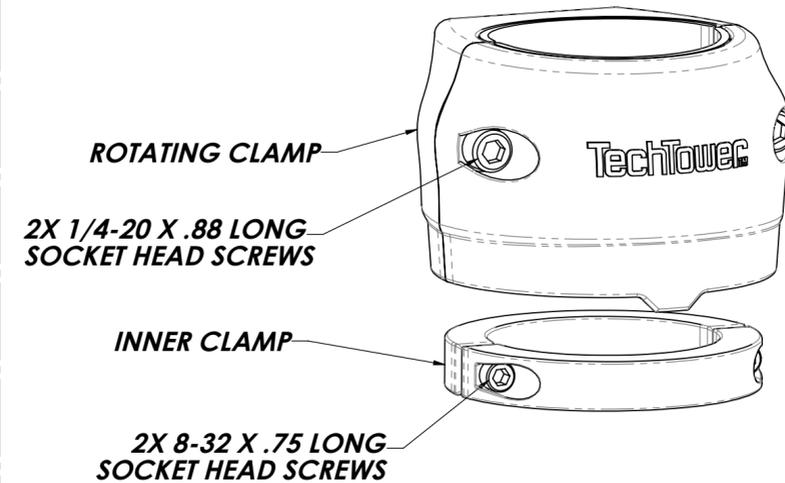

TOOLS LIST:

- 9/64" HEX WRENCH
- 3/16" HEX WRENCH

ADJUSTMENT STEPS:

1. MOVE THE **INNER CLAMP** TO THE HEIGHT POSITION REQUIRED.
2. TIGHTEN THE **2X #8-32 X .75 LONG SOCKET HEAD SCREWS** TO SECURE THE **INNER CLAMP** TO THE **POLE**.
3. LOWER THE **ROTATING CLAMP** TO REST ON TOP OF THE **INNER CLAMP**.
4. TIGHTEN THE **2X 1/4-20 X .88 LONG SOCKET HEAD SCREWS**.
5. IF NECESSARY TO REDUCE ROTATING FRICTION, LOOSEN THE **2X 1/4-20 X .88 LONG SOCKET HEAD SCREWS**.

REV.	DESCRIPTION	DATE	BY	CHK'D
E		04/07/14	JEB	RKT
M.WOODS		1/18/2011		
TechTower 14451 Ewing Ave. Suite 100 Burnsville, MN 55306 Phone: 952-767-1005 Fax: 952-767-1006				
TITLE: TECHTOWER, CUSTOMER INSTALLATION, PAYMENT DEVICE ARM, TO MOUNT OPEN HOLE SWIVEL STAND, ROTATING CLAMP				
DIMS. AND TOLERANCES PER ASME Y14.5 - 1994 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONAL ± 1/32 2 PLC. DEC. ± .03 3 PLC. DEC. ± .010 ANGULAR ± 0°30'		SIZE: C DWG. NO.: 367-2009-01 REV. E SHEET 1 OF 1		

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ENGINEERED NETWORK SYSTEMS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF ENGINEERED NETWORK SYSTEMS IS PROHIBITED.