

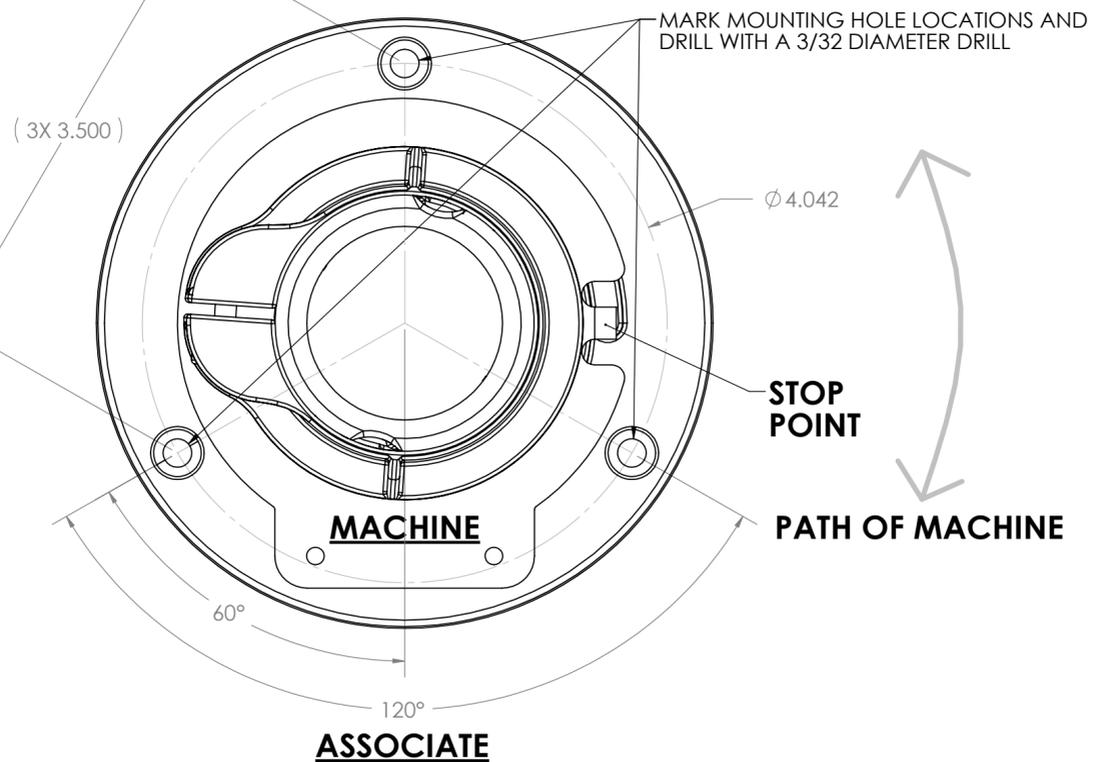
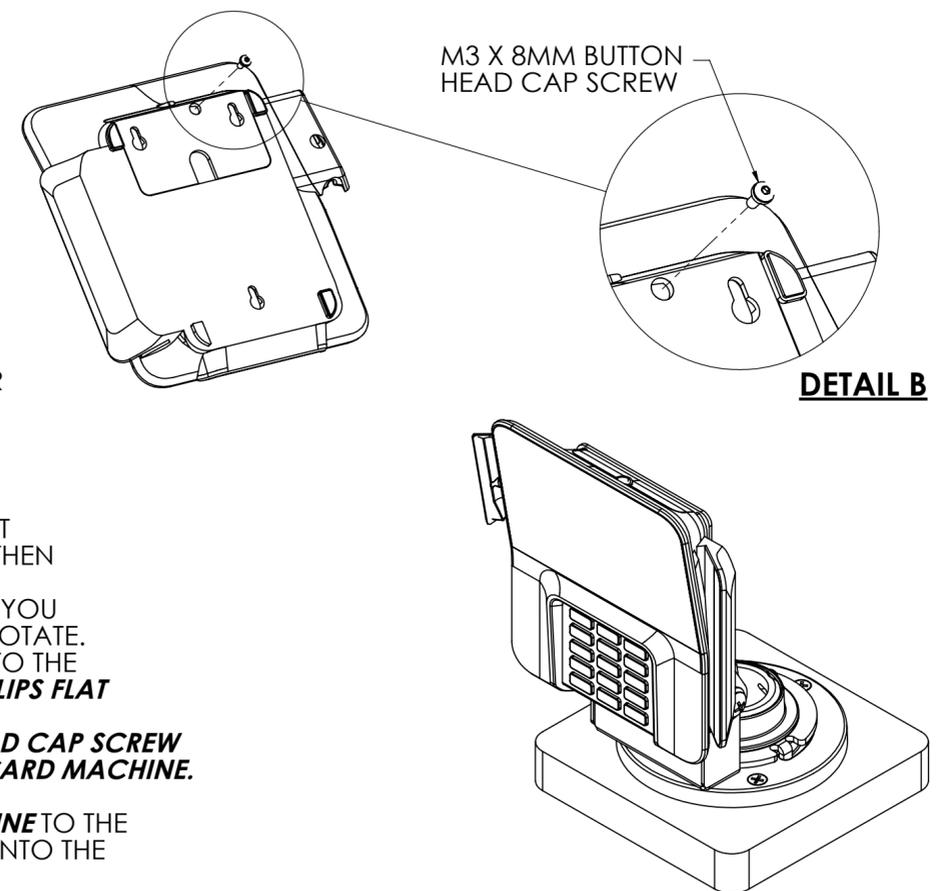


### CUSTOMER MOUNTING OPTION #1

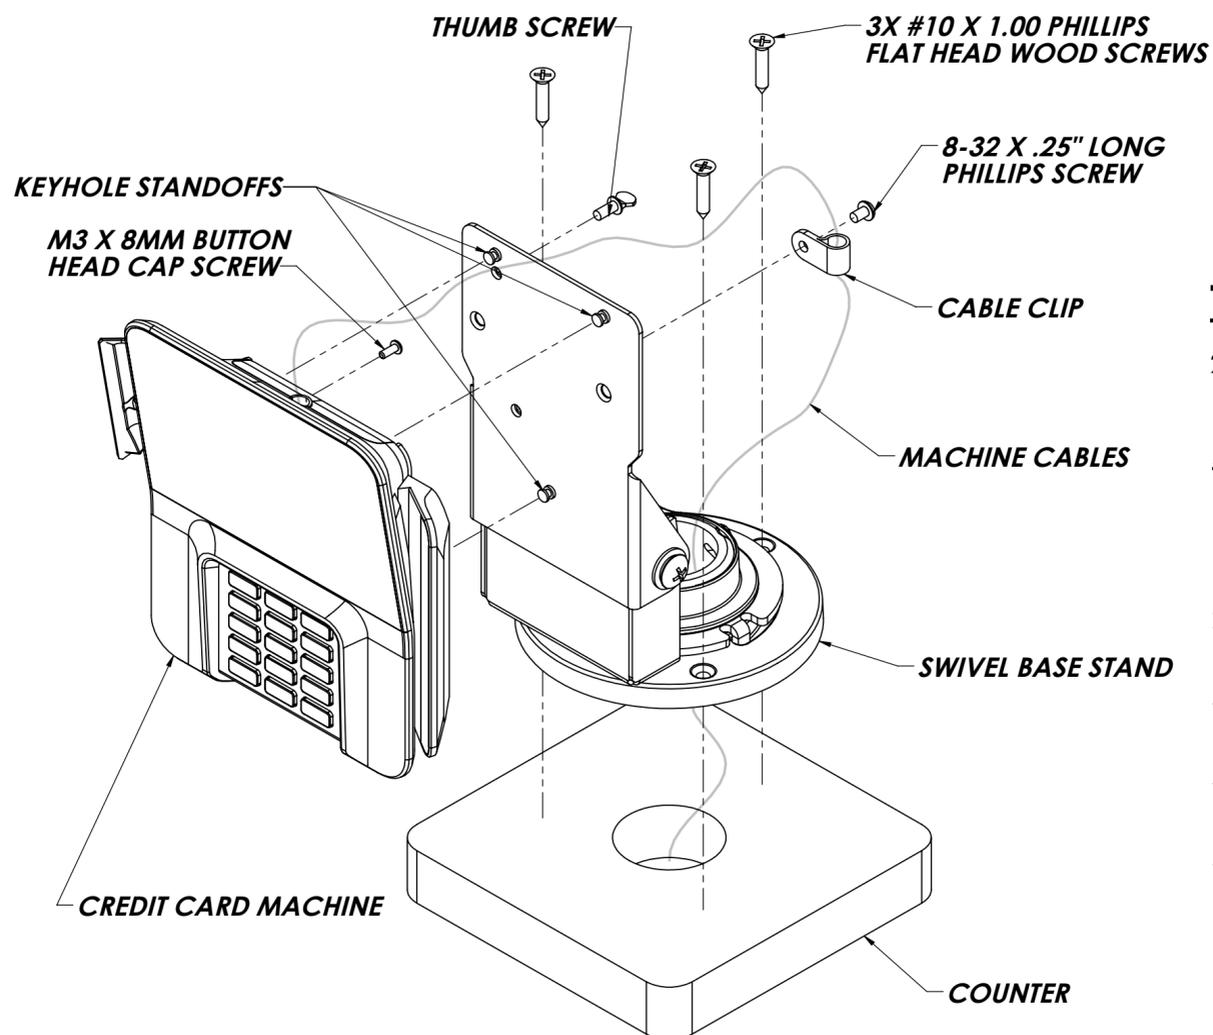

### CUSTOMER MOUNTING OPTION #2

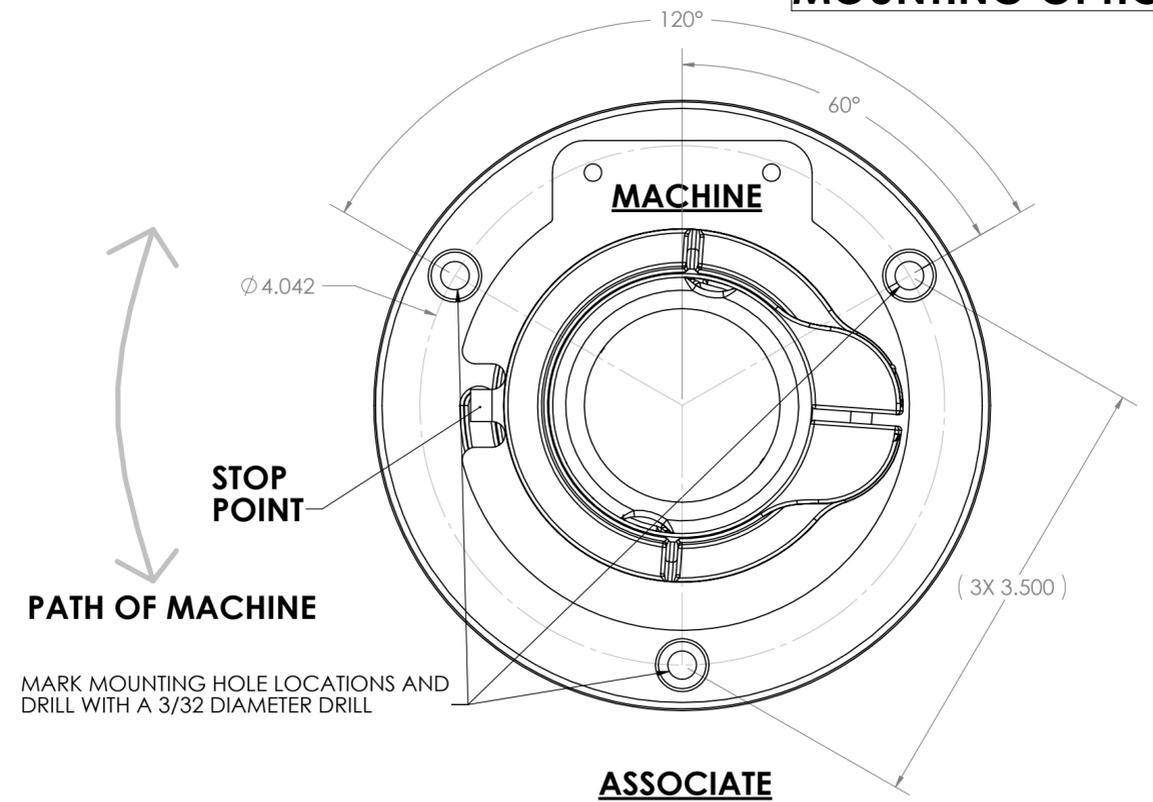

#### TOOL LIST:

- #2 PHILLIPS SCREW OR DRILL DRIVER
- 2MM ALLEN WRENCH (PROVIDED)

#### ASSEMBLY STEPS:

- ROTATE THE **SWIVEL BASE STAND** LEFT OR RIGHT TO THE STOP POINT AND THEN COMPARE IT TO THE ILLUSTRATIONS ABOVE TO DETERMINE WHICH WAY YOU WANT THE **SWIVEL BASE STAND** TO ROTATE.
- ASSEMBLE THE **SWIVEL BASE STAND** TO THE **COUNTER** USING **3X #10 X 1.00 PHILLIPS FLAT HEAD WOOD SCREWS** AS SHOWN.
- INSTALL THE **M3 X 8MM BUTTON HEAD CAP SCREW** TO THE UNDERSIDE OF THE **CREDIT CARD MACHINE**, AS SHOWN IN **DETAIL B**.
- ASSEMBLE THE **CREDIT CARD MACHINE** TO THE **SWIVEL BASE STAND** BY SLIDING IT ONTO THE **KEYHOLE STANDOFFS** AS SHOWN.
- THREAD THE **THUMB SCREW** INTO THE **SWIVEL BASE STAND** TO SECURE THE **CREDIT CARD MACHINE** AS SHOWN.
- ROUTE THE **MACHINE CABLES** THROUGH THE **CABLE CLIP** AND SECURE WITH THE **8-32 X .25\"**

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:

FRACTIONAL	± 1/32
2 PLC. DEC.	± .03
3 PLC. DEC.	± .010
ANGULAR	± 0°30'

REV.	DESCRIPTION	DATE	BY	CHK'D
C		09/08/22	WJC	
1	T. STRAND	9/26/2017		
2				
3				

HAVIS

TITLE: CUSTOMER INSTRUCTIONS, LOW CONTOUR STAND 8°-90°, CENTER HOLE SWIVEL, WITH SMART CARD CLEARANCE, VERIFONE M400

SIZE: C DWG. NO.: 367-4615 REV. C SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.