


INSTALLATION INSTRUCTIONS:

- 1. PLACE FIXED ANGLE MOUNT BRACKET AGAINST THE DESIRED MOUNTING SURFACE.
- 2. USING 9/32" DRILL BIT (OR OTHER DRILL BIT GIVING DIAMETER BETWEEN 0.26" AND 0.28"), DRILL (4X) HOLES IN THE MOUNTING SURFACE THROUGH THE SLOTS IN THE BRACKET (ONE HOLE IN EACH SLOT). MAKE SURE BOTH TOP HOLES AND BOTH BOTTOM HOLES ARE HORIZONTAL WITH EACH OTHER.
- 3. PLACE ONE PINCH PLATE BEHIND THE MOUNTING SURFACE. FASTEN THE BRACKET TO THE MOUNTING SURFACE USING (2X) 1/4-20 X 3/4" HEX BOLTS AND #12 FLAT WASHERS.
- 4. REPEAT STEP NUMBER 3 WITH THE OTHER PINCH PLATE IN THE 2 UNUSED HOLES.
- 5. TIGHTEN ALL FASTENERS TO THE APPROPRIATE INDUSTRY STANDARD.

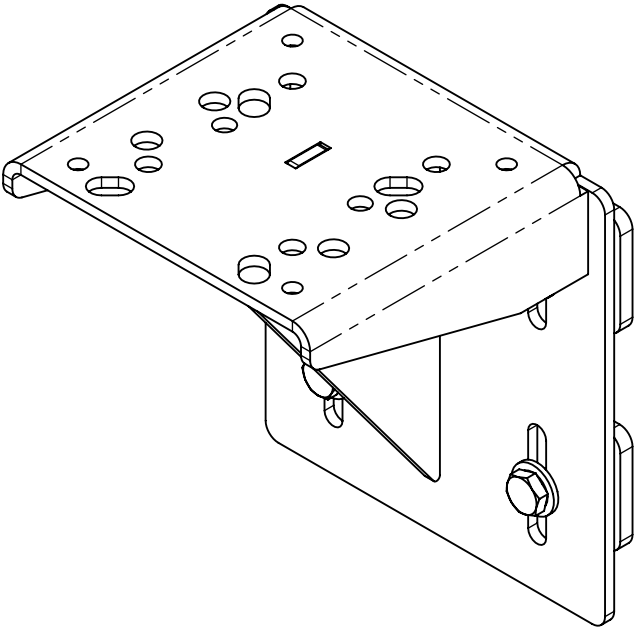


HARDWARE KIT CONTENTS:

DESCRIPTION	QTY.
HEX BOLT - 1/4-20 X 3/4"	4
WASHER - #12 SAE FLAT - 1/4" ID - 9/16" OD - .051"-.080" THK	4

DRAWING NUMBER:
C-HDM-124-INST

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

PRODUCT DESCRIPTION
FIXED 90-DEGREE MOUNT USED FOR
VARIOUS WALL MOUNTING.

PRODUCT I.D. C-HDM-124	DATE 3-06-2024
PRODUCT NAME FIXED ANGLE MOUNT	
 1-800-524-9900 WWW.HAVIS.COM	WEIGHT: (LBS) 2.97
	REV. DATE 3-24