


HAVIS DOCKING STATIONS FOR GETAC V120 LAPTOPS

DS-GTC-1600 SERIES

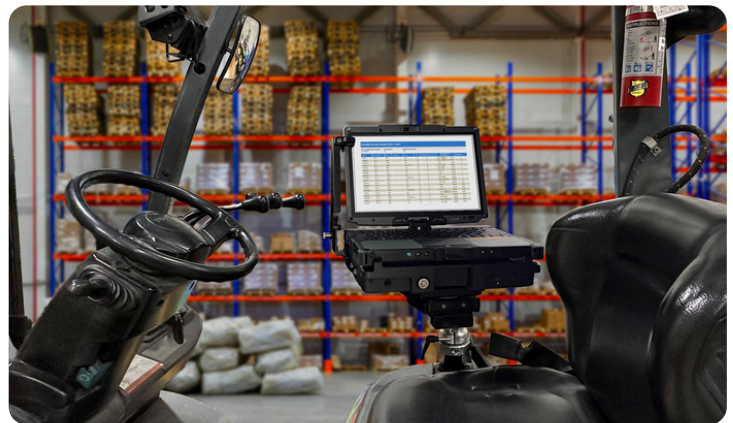

RUGGED GEAR FOR RUGGED JOBS

- Supports Getac's V120 laptops
- Optional port replication with Advanced or Standard content
- Optional Quad pass-through antenna connection
- Optional DS-DA-424 Screen Support, designed to support the laptop screen and reduce vibration
- Optional LPS-211 accessory bracket for mounting the power supply directly to the docking station
- Spring-loaded, floating connector head
- Getac Power Supply Included (LPS-140-BW)
- Compact & lightweight while being ultra rugged
- Lock and key supplied for peace of mind theft deterrence

HAVIS DOCKING STATIONS FOR GETAC V120 LAPTOPS

DS-GTC-1600 SERIES

GETAC V120 LAPTOP SOLUTION

- Intelligent cable management system
- Designed to fit all Havis and VESA 75 hole pattern mounting equipment, as well as most competitors
- Polycarbonate construction ensures strength, ruggedness and extreme temperature resistance
- Rounded edges and corners for comfort and safety



PART NUMBER	ETHERNET (RJ45)	USB 2.0	USB 3.2	USB-C 2.0	USB-C 3.2	HDMI	POWERED SERIAL (DB9)	PASS-THRU ANT	EXT POWER	SCREEN SUPPORT	POWER SUPPLY MOUNTING BRACKET
DS-GTC-1601	1	1	2	1	1		1				
DS-GTC-1601-4	1	1	2	1	1		1	QUAD			
DS-GTC-1602-BW	1	1	2	1	1		1		LPS-140-BW		
DS-GTC-1602-4-BW	1	1	2	1	1		1	QUAD	LPS-140-BW		
DS-GTC-1603											
DS-GTC-1603-4								QUAD			
DS-GTC-1604	1	1	2	1	1	1	1				
DS-GTC-1604-4	1	1	2	1	1	1	1	QUAD			
DS-GTC-1605-BW	1	1	2	1	1	1	1		LPS-140-BW		
DS-GTC-1605-4-BW	1	1	2	1	1	1	1	QUAD	LPS-140-BW		
PKG-DS-GTC-1601	1	1	2	1	1		1			✓	
PKG-DS-GTC-1601-3								QUAD		✓	
PKG-DS-GTC-1602-BW	1	1	2	1	1		1		LPS-140-BW	✓	
PKG-DS-GTC-1602-4-BW	1	1	2	1	1		1	QUAD	LPS-140-BW	✓	
PKG-DS-GTC-1603										✓	
PKG-DS-GTC-1603-4								QUAD		✓	
PKG-DS-GTC-1604	1	1	2	1	1	1	1			✓	
PKG-DS-GTC-1604-4	1	1	2	1	1	1	1	QUAD		✓	
PKG-DS-GTC-1605-BW	1	1	2	1	1	1	1		LPS-140-BW	✓	✓
PKG-DS-GTC-1605-4-BW	1	1	2	1	1	1	1	QUAD	LPS-140-BW	✓	✓
PKG-DS-GTC-1607-BW	1	1	2	1	1		1		LPS-140-BW	✓	✓
PKG-DS-GTC-1607-4-BW	1	1	2	1	1		1	QUAD		✓	✓

SPECIFICATIONS:

Height: 11.8" in (299.72mm)
Width: 11.1" in (281.94mm)
Depth: 3.1" (78.74mm)
Weight: 7.9 lb (3.58 kg)
Mounting: VESA 75

CERTIFICATIONS & TESTING:

Vibration Testing: MIL-STD 810H 514.8
Crash Testing: SAE J1455 30mph
Bump Testing: IEC-68-2006-27
Cycle Testing: Dock/undock 30K cycles
Environmental Testing: Hot/Cold operational -31° C to 63° C (-23.8° F to 145° F); Hot/Cold storage -40° C to 85° C (-40° F to 185° F)
Thermal Shock: MIL-STD 810H, Method 503.7
FCC, CE, CAN ICES (B), RoHS
EMC Testing: EN 55032, EN 50498
ESD: IEC 10605

