

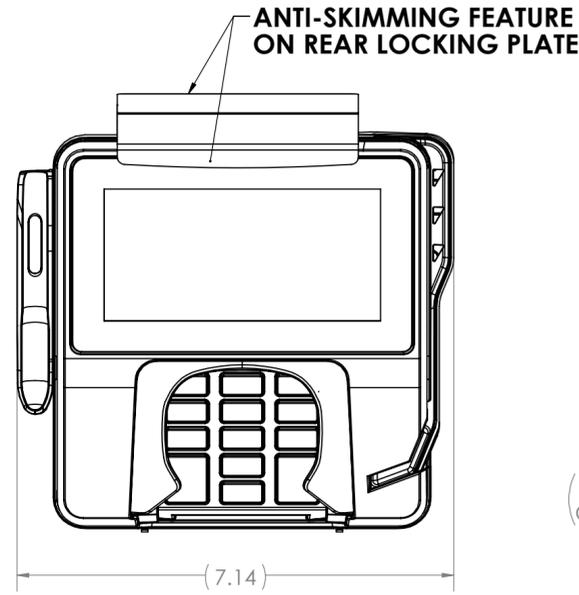



REVISION E CHANGES = **E** (1 CHANGES NOTED ON DRAWING)

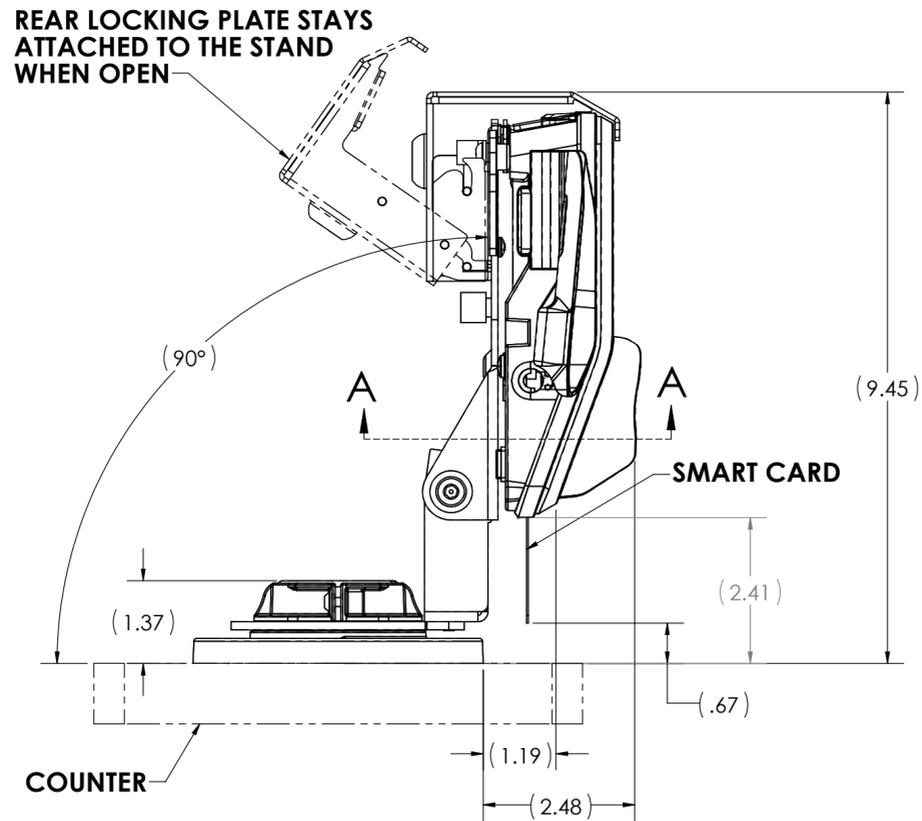



Ø 1.51
(CABLE ENTRY/EXIT)

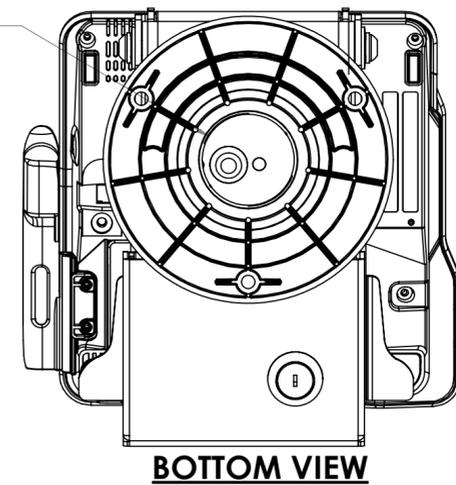

CABLE ROUTING CHANNEL CABLE CLIP
SECTION A-A

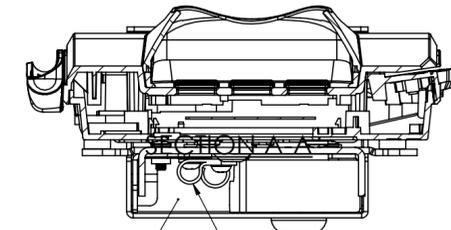

PIVOT MOUNT ASSEMBLY

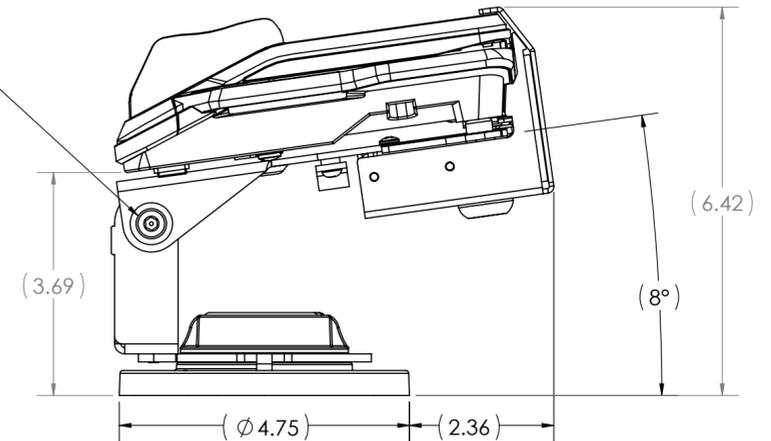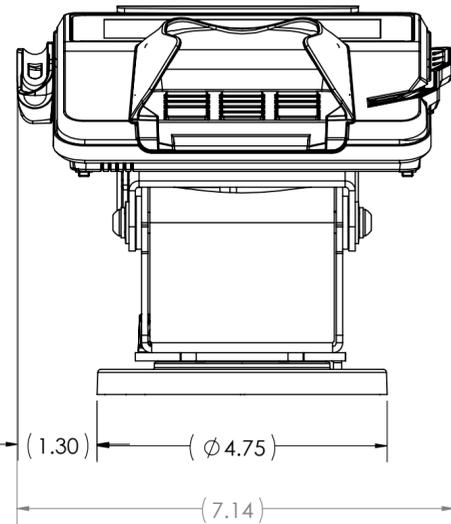

ROHS COMPLIANT

REV.	DESCRIPTION	DATE	BY	CHK'D
E	REVISED PIVOT MOUNT ASSEMBLY FOR IMPROVED PIVOTING PERFORMANCE REVISED PIVOT BRACKET FOR FIT AND FUNCTION WITH SMART CARDS. REVISED FIXED LOCKING BRACKET FOR IMPROVED FUNCTION, DIM 9.45 WAS 9.00, 2.41 WAS 1.96, 3.69 WAS 3.24, 6.42 WAS 5.97. ADDED SMART CARD, DIM .67	06/20/16	SCB	SCB
D	REVISED FIXED LOCKING BRACKET FOR BETTER FIT AND FUNCTION	12/08/14	JEB	SY
C	RE-DESIGNED PIVOT BRACKET FOR BETTER USE WITH SMART CARD. RE-DESIGNED FIXED LOCKING BRACKET FOR BETTER SECURITY. DIM 9.00 WAS 7.94, 1.96 WAS 2.18, 3.24 WAS 2.36, 5.97 WAS 4.80.	08/19/14	ZAG	AZM
B	RELEASE FOR PROTOTYPE	07/07/14	AN	SY
A	RELEASE FOR PROTOTYPE	5/28/14	AZM	

DRAWN A. MCLAUGHLIN		HAVIS	
DATE	5/28/2014		
CUSTOMER APPROVAL (SIGNATURE REQUIRED):		TITLE LOW CONTOUR 8°-90°, WITH REAR LOCKING PLATE, CENTER HOLE SWIVEL STAND, ANTI-SKIMMING FEATURE, EMV CARD CLEARANCE, VERIFONE MX915	
DATE	SIZE C	DWG. NO. 367-3046	REV. E
		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.

CUSTOMER VERIFICATION AND AUTHORIZATION