


## Remove Insert From Charger


**\*\*The insert must be removed from the Zebra charger before installing the Havis adapter\*\***

- Squeeze both sides of the insert inward and lift up to remove.
- Store the insert in a safe place for potential reuse later.

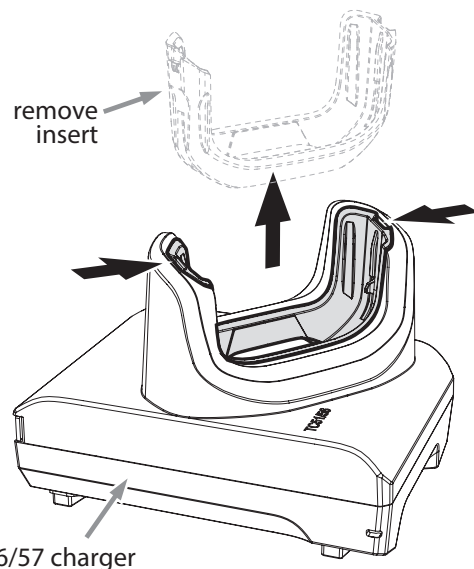

## Install Adapter Onto Charger


- Place the adapter over the charger in the correct orientation
- Push the adapter down on both sides until an audible click is heard from each side.
- To make proper connection, verify the adapter is secured by gently pulling upward.

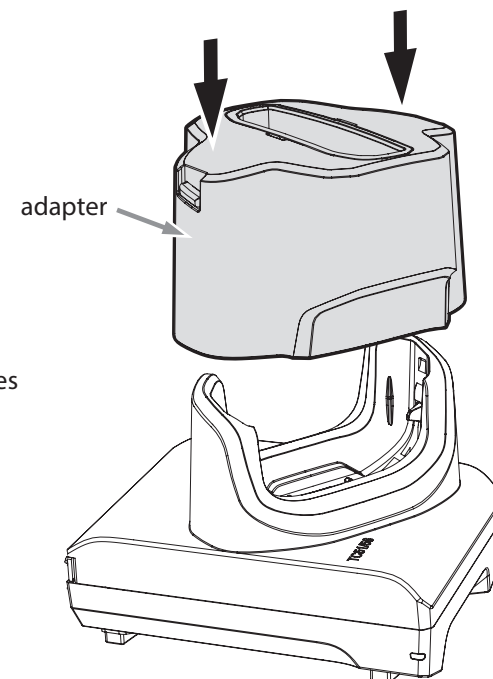

## Remove Insert From Adapter

**\*\*If using the Zebra rugged boot on the TC device, the installed insert must be removed from the adapter\*\***

- Squeeze both sides of the insert inward at the slot positions and lift up to remove.
- Store the insert in a safe place for potential reuse later.

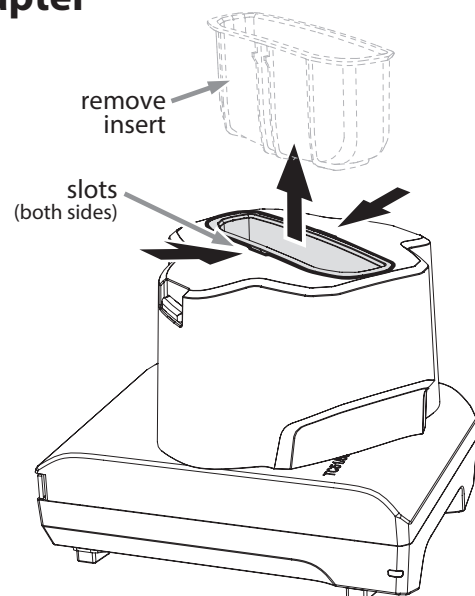

## Remove Adapter From Charger

- Squeeze tabs inward on both sides of the adapter and lift up to remove from the charger

