
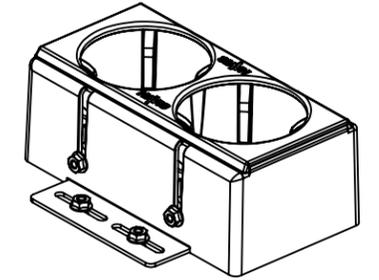


INSTALLATION INSTRUCTIONS:


TRAK MOUNT INSTALLATION INSTRUCTIONS:

1. SEPERATE THE CUP HOLDER ASSEMBLY FROM THE CUP HOLDER FRAME BY INSERTING A FLAT BLADE TOOL INTO END SLOTS AND TURNING.
2. SLIDE THE 1/4"-20 X 1/2" BOLTS INTO THE TRAK MOUNT. ATTATCH THE L-BRACKET USING FLANGE NUTS.
3. ATTATCH THE CUP HOLDER BRACKET TO THE L-BRACKET USING THE 1/4"-20 X 1/2" BOLTS AND FLANGE NUTS.
4. REINSTALL THE CUP HOLDER ASSEMBLY INTO THE CUP HOLDER FRAME.

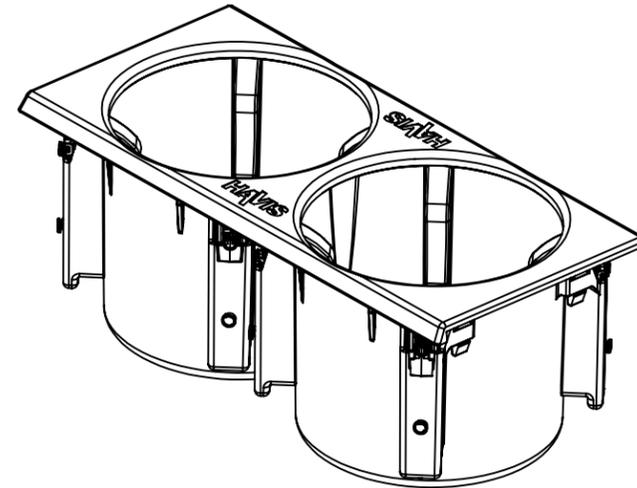

SIDE MOUNT INSTALLATION INSTRUCTIONS :

1. SEPERATE THE CUP HOLDER ASSEMBLY FROM THE CUP HOLDER FRAME BY INSERTING A FLAT BLADE TOOL INTO END SLOTS AND TURNING.
2. ATTATCH THE CUP HOLDER BRACKET TO THE SIDE OF THE CONSOLE USING THE 1/4"-20 X 1/2" BOLTS AND FLANGE NUTS.
3. REINSTALL THE CUP HOLDER ASSEMBLY INTO THE CUP HOLDER FRAME.

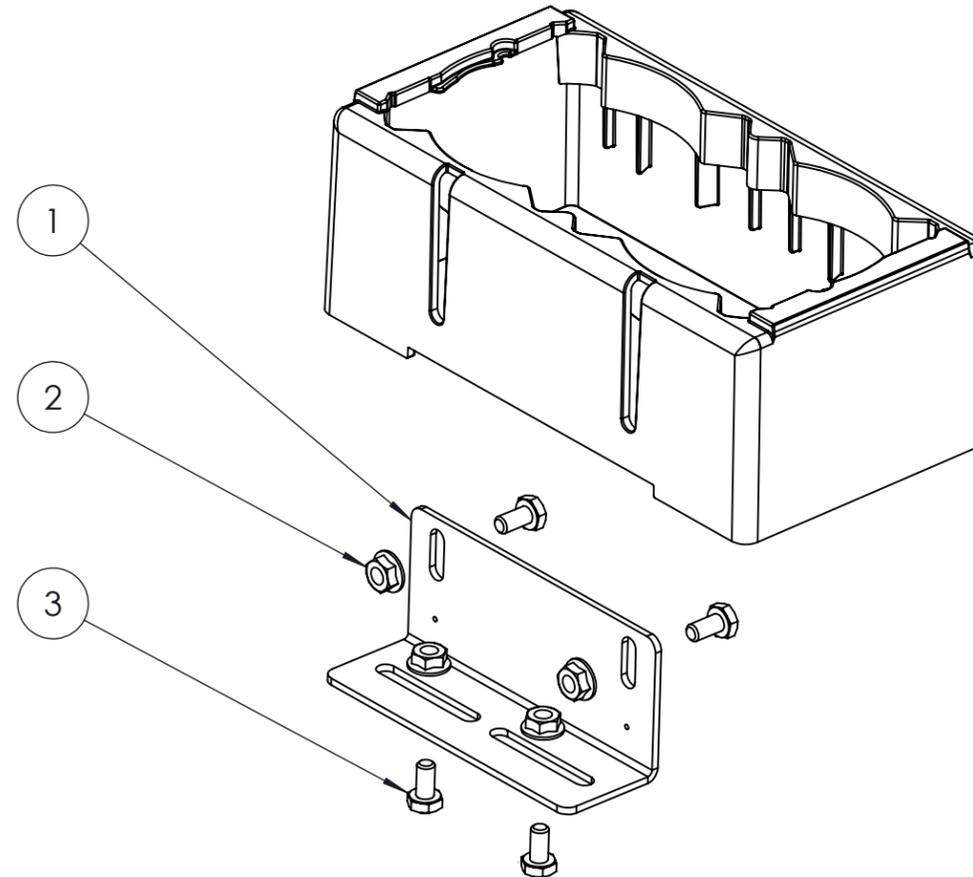

HARDWARE KIT CONTENTS:

LINE	QTY.	ITEM NUMBER	DESCRIPTION
1	1	13355	L-BRKT, EXTERNAL CUP HOLDER
2	4	16013	NUT 1/4-20 HEX FLANGE SERRATED ZP, BLK
3	4	16325	SCREW 1/4-20 X 1/2 HHCS, BLK, ZP, GRD 5

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

DRAWING NO.

10-011240

PRODUCT DESCRIPTION

**INSTRUCTION MANUAL,
CUP2-1002**

HAVIS

1-800-524-9900
WWW.HAVIS.COM

WEIGHT: (LBS)

1.531

REV. DATE

11/4/2020