


INSTALLATION INSTRUCTIONS:

1. REMOVE FRONT PASSENGER SEAT TRIM CAPS.
2. REMOVE FRONT PASSENGER SEAT BOLTS.
3. LOOSEN REAR SEAT BOLTS AS NEEDED TO HELP CREATE CLEARANCE UNDER SEAT RAILS FOR BASE.
4. LIFT FRONT OF SEAT BASE AND SLIDE HDM BASE BETWEEN FLOOR AND SEAT BASE.
5. REINSTALL SEAT BOLTS AND TIGHTEN ALL BOLTS TO MANUFACTURER'S TORQUE SPECIFICATION.
6. FOLLOW GENERAL INSTRUCTIONS FOR POLE AND UPPER MOUNT PARTS.

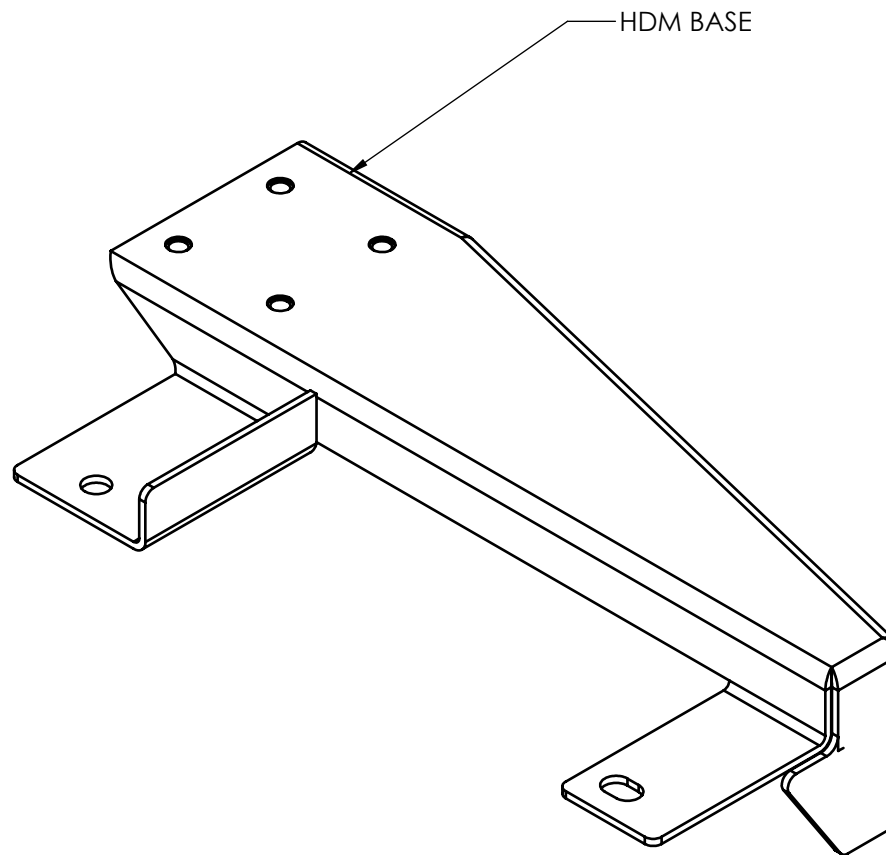

<b>HAVIS</b> HAVIS, INC.		75 JACKSONVILLE RD. WARMINSTER, PA. 18974 1-800-524-9900
TITLE: INSTALLATION INSTRUCTIONS, FORD RANGER HDM BASE		
DO NOT SCALE DRAWING		
SIZE <b>A</b>	DWG. NO. C-HDM-1005-INST	REV 3-19
WEIGHT (LB): 4.6776	SCALE: 1:3	SHEET 1 OF 1