

INSTALLATION:

1. FOR VEHICLE WITH OEM 40/20/40 BENCH SEAT.
2. REMOVE CENTER SEAT MOUNTING BRACKETS IF REQUIRED.
3. PLACE HUMP BRACKET OVER FORWARD SEAT MOUNTING HOLES AND UNDERNEATH THE SEAT.
4. INSTALL HUMP BRACKET USING OEM BOLTS
5. INSTALL CONSOLE OR TRACK TO HUMP BRACKET USING (4) 1/4-20 X 3/4 HEX HEAD BOLTS, FLAT WASHERS AND 1/4-20 FLANGED NUTS.


NOTES:

RECOMMENDED MOUNTING BRACKET FOR C-AS-840-8 OR C-AS-840-11 CONSOLES.

IF CONSOLE IS NOT DESIRED, EQUIPMENT CAN BE MOUNTED DIRECTLY TO FLOOR BRACKET.

IF CONSOLE IS NOT DESIRED AND MORE SURFACE AREA IS NEEDED, AN OPTIONAL C-TMW-12E PLATE CAN BE BOLTED TO THE FLOOR BRACKET.

NOTE: DOES NOT WORK WITH OEM CENTER CONSOLE.

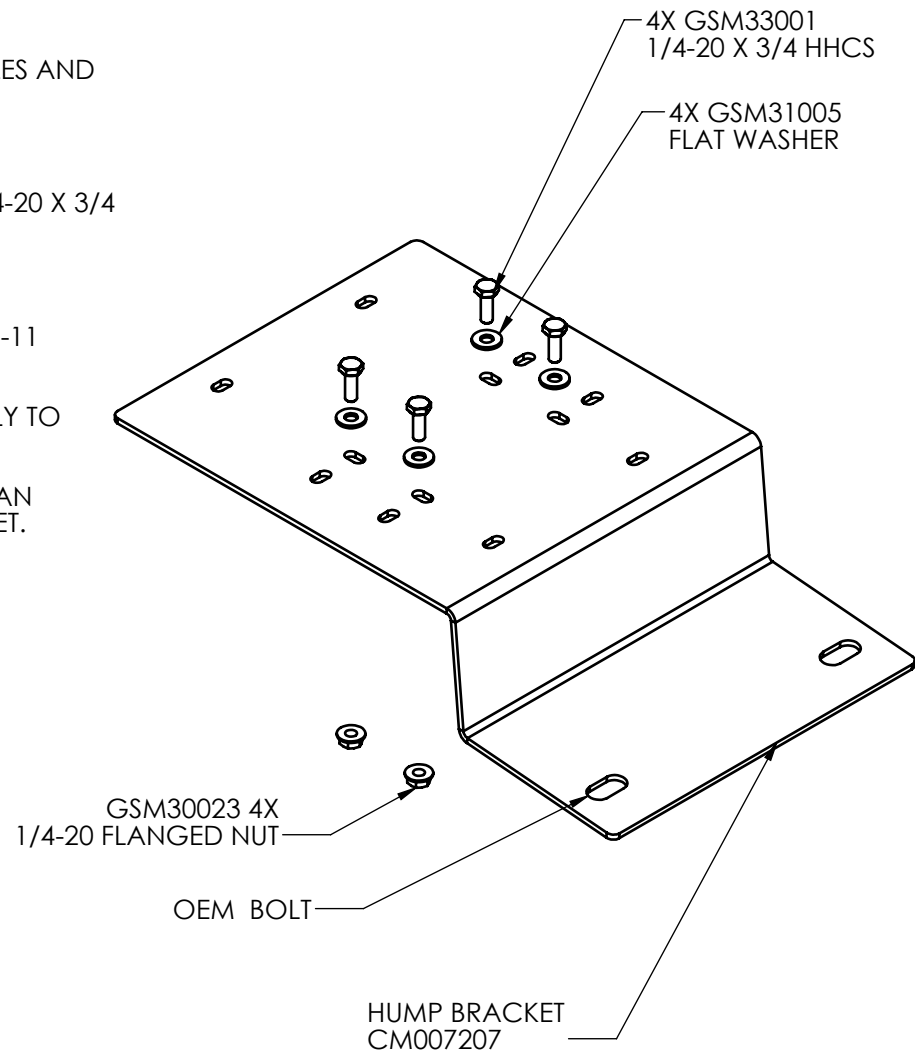

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION
1	1	10-007207	BRKT, FRONT HUMP CONSOLE MOUNTING F-150
2	4	GSM30023	NUT 1/4-20 HEX FLANGE SERRATED ZP, BLK
3	4	GSM33001	SCREW 1/4-20 x 3/4" HHCS ZP
4	4	GSM31005	WASHER, 1/4 FLAT ZP, BLACK

HAVIS HAVIS, INC.		75 JACKSONVILLE RD. WARMINSTER, PA. 18974 1-800-524-9900
TITLE: INSTALLATION, HUMP BRKT, 2015 F-150		
DO NOT SCALE DRAWING		
SIZE A	DWG. NO. C-B70-INST	REV 4-15
WEIGHT (LB): 5.90	SCALE: 1:4	SHEET 1 OF 1