


INSTALLATION INSTRUCTIONS:


- 1. REMOVE OEM CONSOLE OR CENTER SEAT DEPENDING ON TRIM LEVEL EXPOSING THE M12-1.75MM MOUNTING LOCATIONS.
- 2. USE (4) M12-1.75MM X 20MM BOLTS AND WASHERS TO FASTEN THE MOUNTING BRACKETS TO THE TUNNEL.
- 3. SLIDE (4) 1/4"-20 X 3/4" BOLTS INTO THE LOWER SLOTS ON THE HAVIS TRAK.
- 4. ALIGN BOLTS WITH THE INNER SLOTS ON THE MOUNTING BRACKET AND USE (4) FLANGE NUTS TO LOOSELY SECURE HAVIS TRAK TO MOUNTING BRACKETS.
- 5. [OPTIONAL] SLIDE REAR TRIM PANEL UNDER MOUNTING BRACKETS, ALIGN BOLTS TO (2) CENTER SLOTS.
- 6. ALIGN HAVIS TRAK IN DESIRED LOCATION AND SECURE ALL HARDWARE.
- 7. BEFORE INSTALLING END CAPS, SLIDE HARDWARE TO MOUNT OTHER EQUIPMENT INTO THE UPPER SLOTS ON TRAK.
- 8. REMOVE LINERS FROM ADHESIVE TAPES AND INSTALL ENDCAPS ONTO HAVIS TRAK

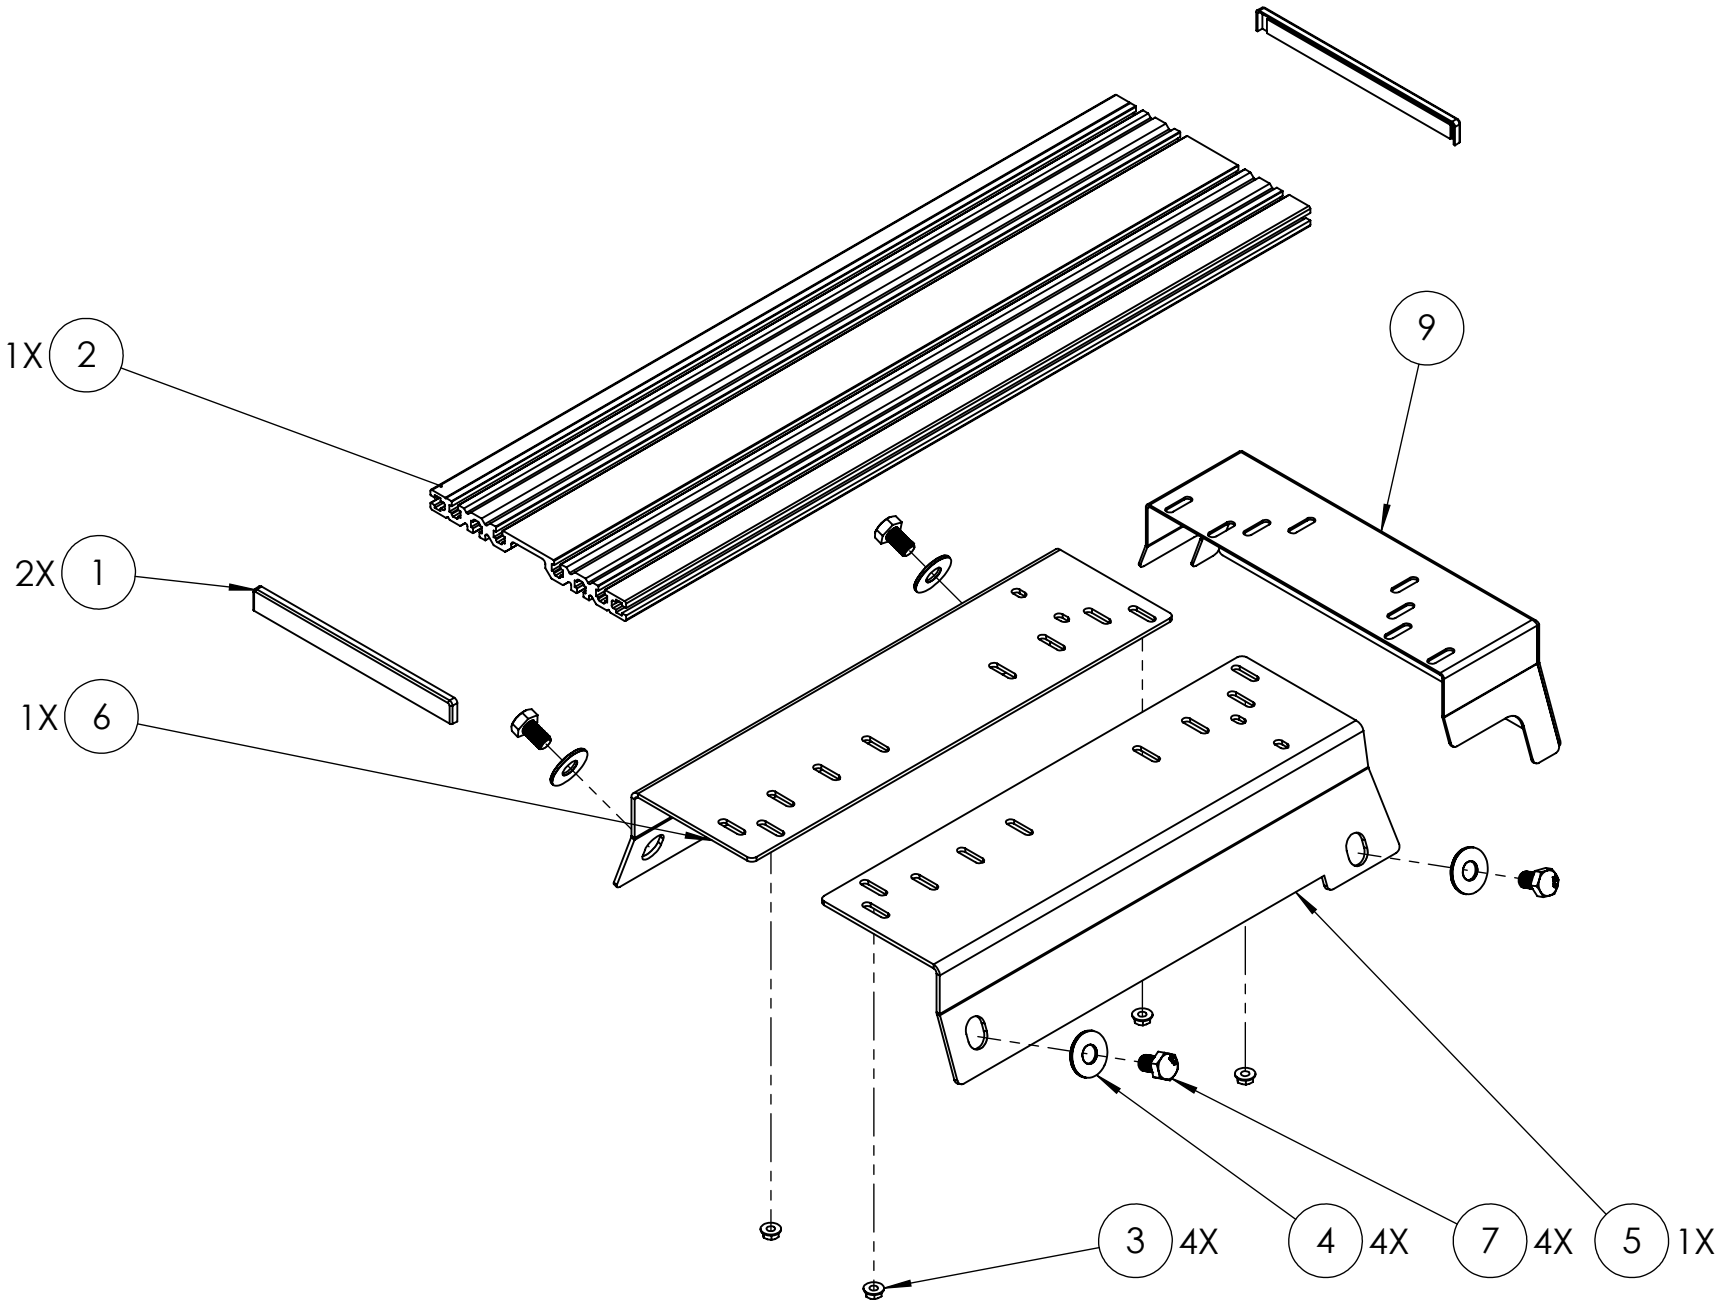

HARDWARE KIT CONTENTS:

LINE	QTY.	ITEM NUMBER	DESCRIPTION
1	2	11313	KIT, TRAK MOUNT GASKET AND END CAP
2	1	12969	8" WIDE TRAK MOUNT 28" LONG
3	4	16013	NUT 1/4-20 HEX FLANGE SERRATED ZP, BLK
4	4	16128	HRDW, WSHR, FLT, 7/16 USS ZP
5	1	23411	BRKT, TRAK MOUNT, 2021 TAHOE 9C1
6	1	23412	BRKT, TRAK MOUNT, 2021 TAHOE 9C1
7	4	23727	SCR,M12X1.75-20,HX,H,ST
9	1	25348	BRKT, REAR TRIM PANEL, TAHOE TUNNEL MOUNTS

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

DRAWING NO. 10-011188	
PRODUCT DESCRIPTION ASSY, TRAK MOUNT, 2021 TAHOE	
 1-800-524-9900 WWW.HAVIS.COM	WEIGHT: (LBS) 22.382
	REV. DATE 5-10-2022